UK SERVICE LIFTS

SKG LIFTS UK

ISO-MAX

GOODS LIFT [300-200KG]

UK Service Lifts Ltd
1 Nene Court,
Enterprise Way
Enterprise Park, Yaxley

UKServiceLifts.com
info@UKServiceLifts.com
01942 811 157

300 / 500 kg

Cabin width (CW)	=	800 - 1000 mm
Cabin depth (CD)	=	1100 - 1500 mm
Cabin height (CH)	=	1200 - 2000 mm
Door width (DW)	=	Cabin width
Door height (DH)	=	Cabin height
Pit (P)	=	min. 270 mm
Shaft width (SW)	=	plumbed min. dimensions
Shaft depth (SD)	=	plumbed min. dimensions
Headroom (HR)	=	Clear height of top floor to FFL - underside ceiling!
Finished floor level (FFL)		

750 / 1000 kg

Cabin width (CW)	=	1000 or 1275 mm
Cabin depth (CD)	=	1400 or 1500 mm
Cabin height (CH)	=	1200 - 2000 mm
Door width (DW)	=	Cabin width
Door height (DH)	=	Cabin height
Pit (P)	=	min. 200 mm
Shaft width (SW)	=	plumbed min. dimensions
Shaft depth (SD)	=	plumbed min. dimensions
Headroom (HR)	=	Clear height of top floor to FFL - underside ceiling!
Finished floor level (FFL)		

Special dimensions on demand.

Cabin width (CW)	=	800 - 1500 mm
Cabin depth (CD)	=	1100 - 1800 mm
Cabin height (CH)	=	1200 - 2000 mm
Headroom (HR)	=	min. CH + 1000 mm

ISO-MAX

Capacity 300, 500, 750, 1000, 2000 kg

Goodslift without passenger transport.

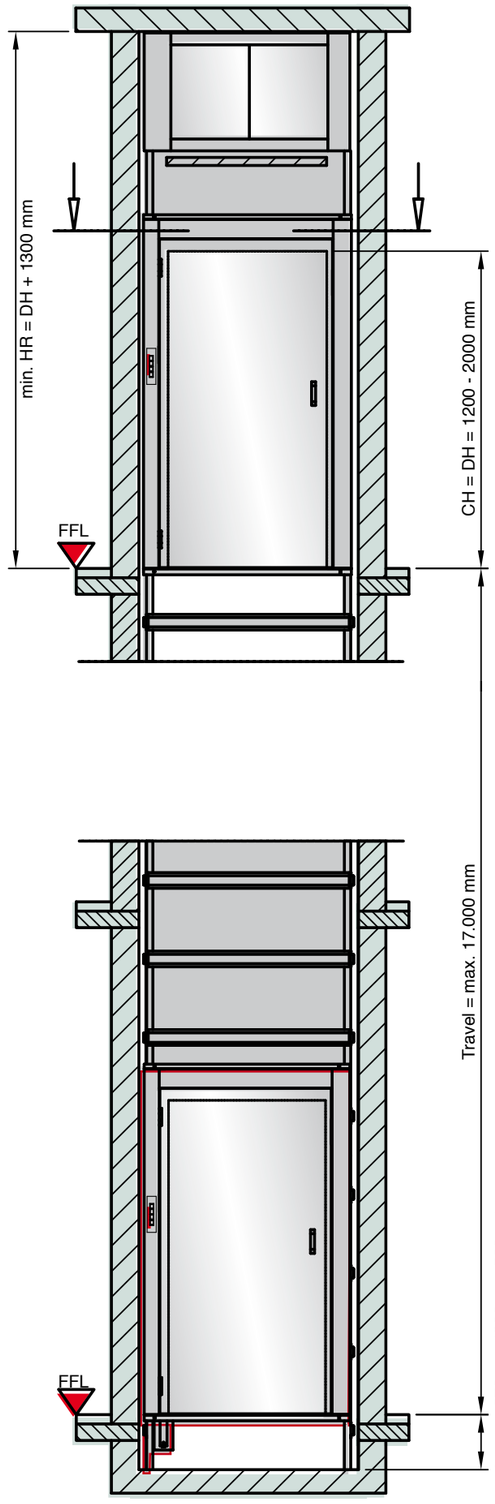

10 ADVANTAGES

- *Corrosion proof*
- *Galvanized shaft structure (self-supporting only on 750 and 1000 kg)*
- *Shaft pit depth 270 mm (300 and 500 kg) or 200 mm (750 and 1000 kg)*
- *Landing push buttons with call and send control*
- *Machine-room-less lift*
- *Accessible spaces underneath the shaft possible*
- *Easy mounted steel shaft cladding available (only for 750 and 1000 kg with no fire protection)*
- *Space saving installation - compact construction*
- *Pre-assembled for easy installation*
- *No brick shaft necessary (only for 750 and 1000 kg)*

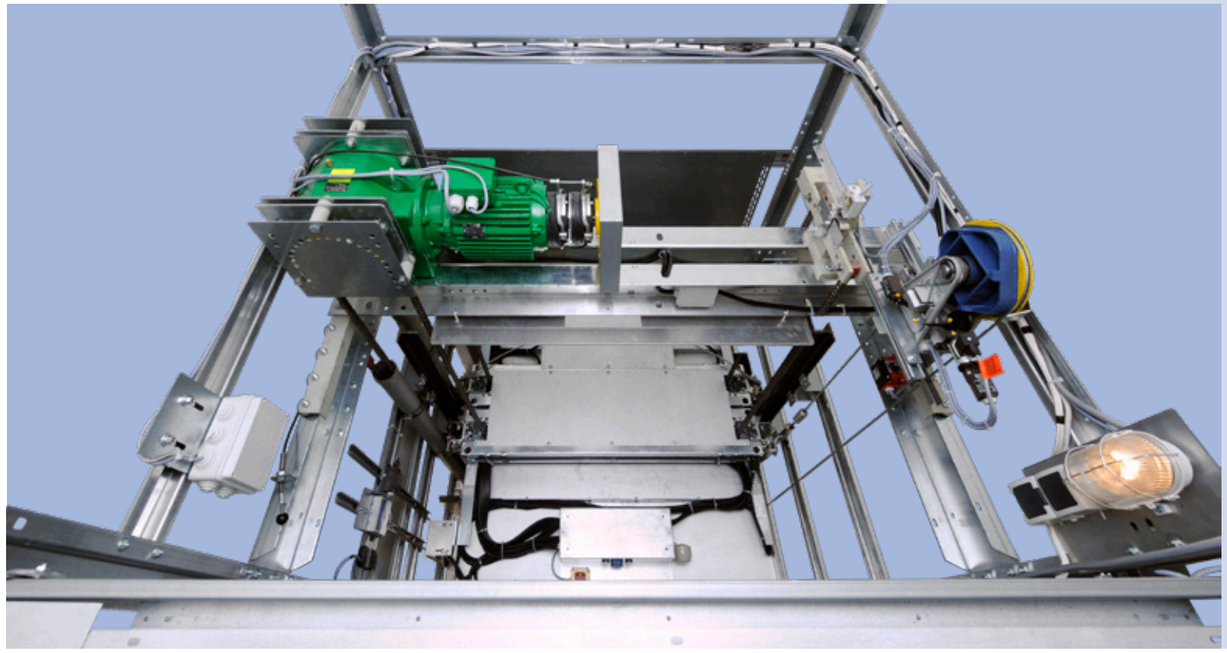

300 / 500 kg

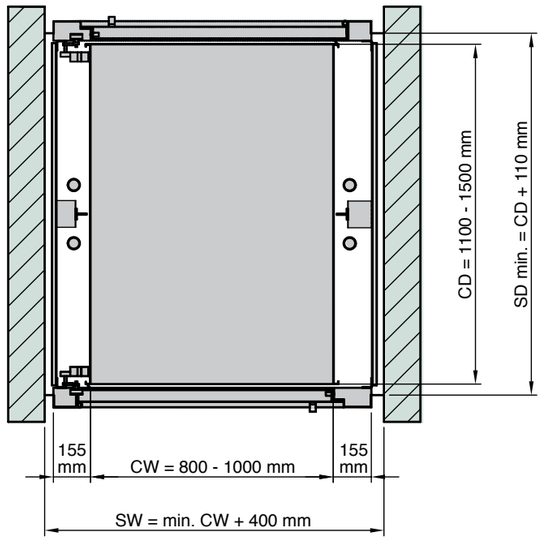

750 / 1000 kg

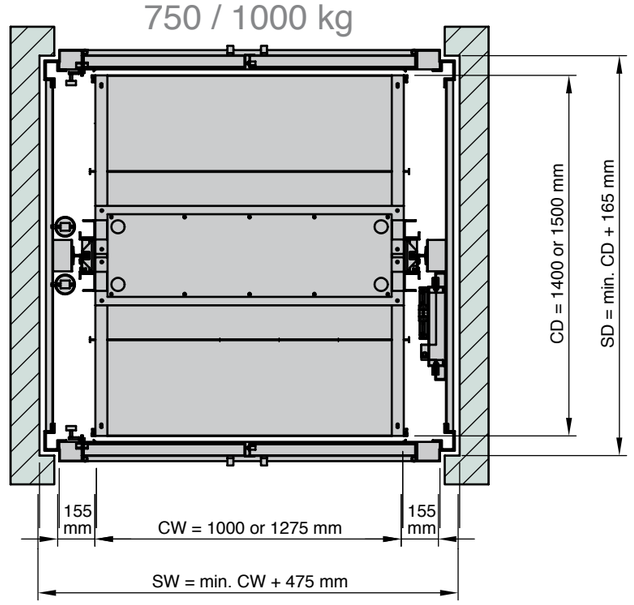

SKG Lifts UK
is a trading name of
UK Service Lifts Ltd

England
Phone: +44 (0) 1942 811 157
Email: info@skg-lifts.co.uk
www.skg-lifts.co.uk

STANDARD EQUIPMENT

STRUCTURE

- Self-supporting steel structure made of cold rolled profiles in galvanized finish.
- Pre-installed with T-guide rails T 45 mm x 5 mm (300 and 500 kg).
- Pre-installed with T-guide rails T 70 mm x 65 mm x 9 mm (750 and 1000 kg).
- Compensation device on suspension elements.
- With baffle plates.

CABIN

- Cant-off system made of galvanized steel.
- Adjustable guide shoes on both sides.
- Type tested safety gear.

SWING DOORS

- Manual operated hinged doors made of galvanized steel in accordance to DIN 18090.
- Production controlled by TÜV-authorities.
- With side frames made of galvanized steel.
- Type-tested door locks.
- Single- or double-hinged doors possible.

MAINTENANCE DOOR

- Hinged door with sash lock.
- With side frames made of galvanized steel.
- With contact.

DRIVE MACHINE

- Drive unit with standard motor IP 54 and oil filling by factory.
- Disc brake and hand wheel.
- Rotary current 400 V / 50 HZ along IEC.

CONTROLLER

- Call- and send control.
- Pre-wired as plug-in system.
- Position indicator at each landing.

Doku.-Nr. D-19-305E 10/2023